



# ANNUAL PRODUCT CATALOGUE

Industrial Vacuum Cleaner  
Industrial Dust Collector  
Welding Fume Extractor



## DONGGUAN VILLO ENVIRONMENTAL PROTECTION INC. (HEADQUARTER)

Address: #95 Jinghai East Road, Shatou Village, Chang' an Town,  
Dongguan City, Guangdong Province, China

TEL: +86(769) 3885 3355

## VILLO Germany GmbH

Address: Hochstrasse 12-17 47228 Duisburg, Germany

TEL: +49 20 65 6888 966

## VILLO & Envsafe Environmental Protection and Safety Research Institute (Suzhou) Co., Ltd.

Address: #26-1, Torch Road, High-tech District, Suzhou City, JiangSu Province, China

TEL: +86(512) 6737 6768

## Hunan VILLO Environmental Protection Safety Technology Co., Ltd.

Address: Building A2, Changsha Mining Research Institute, #966, Jiangshan South Road,  
Yuxin District, Changsha City, Hunan Province, China

TEL: +86(731) 8558 1213

## Ningde VILLO New Energy Engineering Co., Ltd.

Address: #70, National Highway, Liudu Village, Qidu Town, Jiaocheng District, Ningde City,  
Fujian Province, China

TEL: +86(593) 2830096



# Company Profile



Dongguan Villo Environmental Protection Inc. (Stock code: 833214), engaged in the R & D, sales and service of intelligent industrial explosion-proof dust removal equipment. It is a comprehensive system solution provider that solves the dust, particles, and harmful gases generated in the production process which affects production safety, product quality, employee health, and environmental protection standards. The first company in China to obtain the German TÜV ATEX explosion-proof certification and the Chinese EX explosion-proof certification. It is the first listed company of domestic industrial explosion-proof intelligent dust removal equipment and one of the participants in the formulation of domestic explosion-proof ventilation equipment standardization.

The intelligent explosion-proof dust removal system from VILLO is widely used in new energy, lithium battery, laser, metal 3D printing, food and pharmaceutical, chemical and other industrial production fields. It's the most competitive manufacturer of dust removal equipment.

Main products: industrial vacuum cleaner, dust collector (or collection system), welding fume extractor and explosion-proof valves and quench.



# Company Culture



### Business Purpose

> Villo is consistently striving to provide environmental protection and safety solutions to achieve the goal of safer environment. We are motivated by the fact that the work we do is improving the lives of masses.



### Mission Statement

> Since from the beginning, Villo is passionate to become a leader in providing dust collection equipment to fulfill the quest of safer and cleaner environment. We are committed to provide best-in-class products and services to the customers.



### Core Values

> Villo is an organization driven by teamwork. Teamwork has assisted us in achieving departmental cooperation and cross-cultural collaborations.  
> Villo is dedicated to earn customer's trust and respect primarily by responding to their needs and requirement in timely and efficient manner.

# Villo Development

2007  
↓  
2020



Leading the Industry of Environmental Protection and Safety Solutions

## 2007

In 2007

Villo established

## 2015

In 2015

Villo listed in domestic NEEQ  
Stock code: 833214

## 2017

In 2017

Became Strategic partners  
with National explosion  
proof equipment quality  
inspection center

## 2017

In 2017

Villo USA established

## 2018

In 2018

Villo Envsafe established

## 2019

In 2019

Villo Germany established

## 2020

In 2020

Villo Hunan established  
Villo Ningde established

# Our Customers



# CONTENTS

Leading the Industry of Environmental Protection  
and Safety Solutions



**VKD Series**  
Upright Compact & Economical Industrial  
Vacuum Cleaner

15-16



**VA Series**  
Three Phase Compact Industrial  
Vacuum Cleaner

17-18



**V3 Series**  
Single Phase Compact & Economical Industrial  
Vacuum Cleaner

13-14



**VZ/ VZSB Series**  
Heavy Duty Industrial Vacuum Cleaner  
ATEX Heavy Duty Industrial Vacuum Cleaner

19-22



**VS Series**  
Wet & Dry Vacuum Cleaner

11-12



**VZF Series**  
Heavy Duty Pulse Jet Industrial Vacuum Cleaner

23-24



**VTS Series**  
Basic Compact & Economical Vacuum Cleaner

09-10



**VFG Series**  
Two-stage Filtration Industrial Vacuum Cleaner

25-26

# CONTENTS

Leading the Industry of Environmental Protection  
and Safety Solutions



**VJFX Series**  
Industrial Auto Discharge Dust Collector

35-36



**VJCF Series**  
High Negative Pressure Type Central  
Vacuum System

37-38



**VJFB Series**  
Industrial Explosion Proof Dust Collector

33-34



**VX Series**  
Cabinet Type High Pressure Dust Collector

39-40



**VJF Series**  
Air Pulse Jet Dust Collector

31-32



**VN Series**  
Separator Built-in Type Dust Collector

41-42



**VJ-H Series**  
Manual Cleaning Type Industrial Dust Collector

29-30



**VJFCB Series**  
High Negative Pressure Explosion Proof  
Dust Collector

43-44

# CONTENTS

Leading the Industry of Environmental Protection  
and Safety Solutions



**VH- Z Series**  
Large Air Flow Type Central Dust Collector

49-50



**VH/VHX Series**  
Multiple Filtration Type Fume Extractor

51-52



**VFO Series**  
Dust Collection System

47-48



**VH-T/VHT Series**  
Filter Cartridge Type Fume Extractor

53-54



**VJFGB Series**  
Moderate High Pressure Explosion Proof  
Dust Collector

45-46



**Accessories**

55-58

# INDUSTRIAL VACUUM CLEANER



## Introduction

Villo's series of industrial vacuum cleaners cover the needs and applications for broad range of industries. They are powerful, compact and capable of vacuuming diverse range of substances and dust media for continuous operations.






# VTS Series



Basic Compact & Economical Vacuum Cleaner

## • Product Description

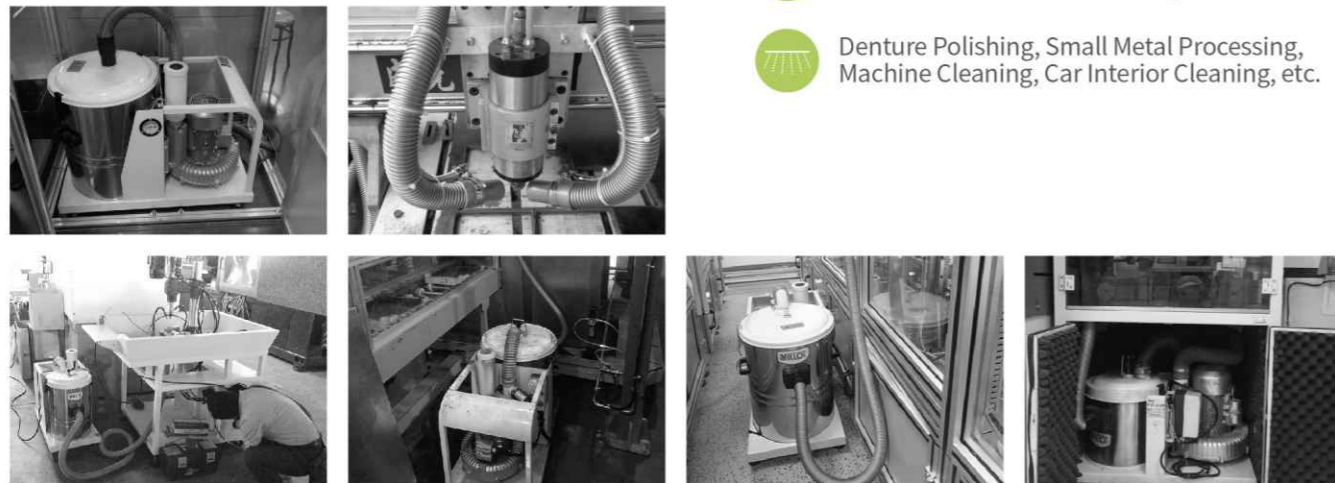VTS series are Single Phase or Three Phase Vacuum Cleaners with high pressure; very ideal for small space, high precision and continuous applications.



## • Applications

-  Suitable for single phase or three phase working conditions.
-  Suitable for the working applications that require continuous work and have height limitations.
-  Denture Polishing, Small Metal Processing, Machine Cleaning, Car Interior Cleaning, etc.

## • Technical Parameters

Model	VTS-75	VTS-150	VTS-220	VTS-300	VTS-400
Voltage (V / Hz)			380 / 50		
Power (kW) / (HP)	0.85 / 1.15	1.6 / 2.15	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5
Max air flow (m <sup>3</sup> /h) / (CFM)	145 / 85	210 / 55	265 / 156	318 / 187	420 / 247
Max vacuum (mmH <sub>2</sub> O) / (kPa)	1600 / 15.7	2000 / 19.6	2350 / 23	2600 / 25.5	2600 / 25.5
Noise dB (A)	65±2	70±2	72±2	72±2	76±2
Air inlet Dia. (mm) / (in)	Ø 40 / 1.6				
Filter area (m <sup>2</sup> ) / (sq.ft)	1.1 / 11.8				
Filter efficiency	>99%				
Capacity of collection barrel (L) / (gal)	35 / 9.25		70 / 18.50		
Dimensions [LxWxH] (mm) / (in)	710*410*700 / 28*16.2*27.6		860*470*730 / 33.9*18.5*28.8		
Weight (kg) / (lb)	45 / 99		57 / 126	65 / 144	69 / 152

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Compact and simple
- Customizable voltage  
Power less than or equal to 2.2 kilowatts can be made into single phase.
- Equipped with filter cleaning device for easy filter cleaning.
- Maintenance free powerful turbine motor can work continuously for 24 hours.
- Pressure gauge to detect filter clogging.



## • Optional Configurations

- > Filter bag
- > Swivel Casters with Brakes
- > Vertical Structure for Better Mobility  
— VTF Series
- > Stainless Steel Version  
— VTDF Series
- > Remote Control

# VS Series




Wet & Dry Vacuum Cleaner

## • Product Description

VS series are Three Phase Industrial Vacuum Cleaners with high pressure; very ideal for high precision Wet & Dry general cleaning applications.



## • Applications

-  Suitable for continuous working conditions.
-  Suitable for wet and dry dust vacuum cleaning.
-  General cleaning, etc.

## • Technical Parameters

Model	VS-22J	VS-40J
Voltage (V / Hz)	380 / 50	
Power (kW) / (HP)	2.2 / 3.0	4.0 / 5.5
Max air flow (m <sup>3</sup> /h) / (CFM)	265 / 156	420 / 247
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2350 / 23	2600 / 25.5
Noise dB (A)	72±2	75±2
Air inlet Dia. (mm) / (in)	Ø 40 / 1.6	
Filter area (m <sup>2</sup> ) / (sq.ft)	1.5 / 16.2	
Filter efficiency	>99%	
Capacity of collection barrel (L) / (gal)	80 / 21.1	
Dimensions [LxWxH] (mm) / (in)	1200*570*950 / 47.3*22.5*37.4	
Weight (kg) / (lb)	70 / 155	80 / 176

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## Features

- Compact and mobile structure.
- Two filter bags option to meet wet or dry applications.
- Customizable voltage  
Power less than or equal to 2.2 kilowatts can be made into single phase
- Discharge hose for liquids.
- Pressure gauge to detect filter clogging.



## • Optional Configurations

- > Stainless steel version
- > Filter cartridge type
- > Remote Control

# V3 Series




Single Phase Compact & Economical Industrial Vacuum Cleaner

## • Product Description

V3 series are Single Phase Industrial Vacuum Cleaners with high pressure and adjustable air flow; very ideal for high precision general cleaning applications.



## • Applications

-  Suitable for single phase working conditions.
-  Suitable for the working applications that require mobility and adjustable air flow.
-  General floor cleaning, etc.

## • Technical Parameters

Model	V3J	V3J-L	V3JS	V3JS-L
Voltage (V / Hz)	220 / 50			
Power (kW) / (HP)	3.6 / 4.8 (3 pcs, 1.2kW / pcs)			
Max air flow (m <sup>3</sup> /h) / (CFM)	480 / 282.3			
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2500 / 24.5			
Noise dB (A)	82±2			
Air inlet Dia. (mm) / (in)	Ø 50 / 2			
Filter area (m <sup>2</sup> ) / (sq.ft)	1.9 / 20.5		3.5 / 37.7	
Filter efficiency	>99%			
Capacity of collection barrel (L) / (gal)	65 / 17.2	/	65 / 17.2	/
Dimensions [LxWxH] (mm) / (in)	780*670*1460 / 30.7*26.4*57.5	670*505*1490 / 26.4*20.0*58.7	780*670*1460 / 30.7*26.4*57.5	670*505*1490 / 26.4*20.0*58.7
Weight (kg) / (lb)	76 / 167.5	50 / 110	85 / 187.4	55 / 121

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Compact and mobile structure.
- Two filtration options to meet the requirements of different filtration accuracy. (V3J—filter bag type, V3JS—filter cartridge type)
- Equipped with filter cleaning device for easy filter cleaning.
- Three powerful motors with independent controller.
- Easy dust container cleaning.



## • Optional Configurations

- > Turbine motor version: VKD
- > Economical Version: V3JY Series
- > Stainless steel version
- > Collection bag version: V3J-L/V3JS-L
- > Remote Control



# VKD Series




Upright Compact & Economical Industrial Vacuum Cleaner

## • Product Description

VKD series are Compact Industrial Vacuum Cleaners with high pressure; very ideal for small footprint, high precision, mobility and continuous applications.



## • Applications

-  Suitable for single or three phase working conditions.
-  Highly efficient for continuous working applications that require movability and heavy duty.
-  Routing machine cleaning, etc.

## • Technical Parameters

Model	VKD-22	VKD-30	VKD-40
Voltage (V / Hz)		380 / 50	
Power (kW) / (HP)	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5
Max air flow (m <sup>3</sup> /h) / (CFM)	265 / 156	318 / 187	420 / 247
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2350 / 24	2600 / 25.5	2600 / 25.5
Noise dB (A)	74±2	75±2	76±2
Air inlet Dia. (mm) / (in)		∅ 50 / 2	
Filter area (m <sup>2</sup> ) / (sq.ft)		1.9 / 20.5	
Filter efficiency		>99%	
Capacity of collection barrel (L) / (gal)		65 / 17.2	
Dimensions [LxWxH] (mm) / (in)	760*650*1460 / 30*25.6*57.5	760*650*1570 / 30*25.6*61.8	
Weight (kg) / (lb)	94 / 207	125 / 275	130 / 287

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Compact and mobile structure.
- Customizable voltage  
For power less than or equal to 2.2kW, the machine can be customized into single phase.
- Equipped with filter cleaning device for easy filter cleaning.
- Maintenance free powerful turbine motor can work continuously for 24 hours.
- Easy dust container cleaning.



## • Optional Configurations

- > Economical Version: V3 Series
- > Horizontal Structure: VA Series
- > Remote Control

# VA Series







Three Phase Compact Industrial Vacuum Cleaner

## • Product Description

VA Series are three phase Vacuum Cleaners with high pressure; very ideal for sucking/absorbing large mixed particles or chips in continuous applications.



## • Applications

-  Suitable for three phase working conditions.
-  Ideal solution for continuous working, heavy and fine dust working condition.
-  Industries: Metal Processing (grinding, cutting, drilling, etc.)
-  PCB (cutting, drilling, routing, etc.)
-  Textile Cleaning
-  Machine Cleaning

## • Technical Parameters

Model	VA-22J	VA-22J-L	VA-40J	VA-40J-L
Voltage (V / Hz)	380 / 50		380 / 50	
Power (kW) / (HP)	2.2 / 3.0		4.0 / 5.5	
Max air flow (m <sup>3</sup> /h) / (CFM)	265 / 156		420 / 247	
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2350 / 23		2600 / 25.5	
Noise dB (A)	72±2		74±2	
Air inlet Dia. (mm) / (in)	Ø 50 / 2		Ø 50 / 2	
Filter area (m <sup>2</sup> ) / (sq.ft)	1.9 / 20.5		1.9 / 20.5	
Filter efficiency	>99%		>99%	
Capacity of collection barrel (L) / (gal)	65 / 17.2	/	65 / 17.2	/
Dimensions [LxWxH] (mm) / (in)	1080*650*1300 / 42.5*25.6*51.2	1100*650*1500 / 43.3*25.6*59.1	1080*650*1300 / 42.5*25.6*51.2	1100*650*1500 / 43.3*25.6*59.1
Weight (kg) / (lb)	90 / 198		100 / 220	

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Customizable voltage  
For power less than or equal to 2.2kW, the machine can be customized into single phase.
- Equipped with filter cleaning device for easy filter cleaning.
- Maintenance free powerful turbine motor can work continuously for 24 hours.
- Easy dust container cleaning.



## • Optional Configurations

- > Filter cartridge version: VA-JS
- > Motor casing: VZ Series
- > Self-cleaning Version: VZF Series
- > Explosion- proof Version: VZSB Series
- > Collection bag version: VA-J-L/ VA-JS-L
- > Remote Control

# VZ Series






Heavy Duty Industrial Vacuum Cleaner

## • Product Description

VZ/VZS Series are the Heavy Duty Industrial Vacuum Cleaners with high pressure; very ideal for sucking/absorbing large mixed particles or chips in continuous applications or installed to centralized extraction units.



## • Applications

-  Suitable for three phase working conditions.
-  Ideal solution for continuous working, heavy and fine dust working condition.
-  Metal Processing (grinding, cutting, drilling, etc.)
-  PCB (cutting, drilling, routing, etc.)
-  Machine Cleaning

## • Technical Parameters

Model	VZ-22	VZ-30	VZ-40	VZ-55	VZ-75
	VZS-22	VZS-30	VZS-40	VZS-55	VZS-75
Voltage (V / Hz)	380 / 50				
Power (kW) / (HP)	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10.0
Max air flow (m <sup>3</sup> /h) / (CFM)	265 / 156	318 / 187	420 / 247	530 / 312	700 / 412
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2350 / 23	2600 / 25.5	2600 / 25.5	3000 / 29.5	2700 / 26.5
Noise dB (A)	72±2	74±2	75±2	76±2	78±2
Air inlet Dia. (mm) / (in)	Ø 50 / 2				
Filter area (m <sup>2</sup> ) / (sq.ft)	VZ series	1.9 / 20.5			
	VZS series	3.5 / 37.7			
Filter efficiency	>99%				
Capacity of collection barrel (L) / (gal)	65 / 17.2		100 / 26.4		
Dimensions【LxWxH】(mm) / (in)	1180*670*1320 / 45.6*23.4*52		1300*670*1520 / 51.2*26.4*60		
Weight (kg) / (lb)	120 / 265	124 / 273	148 / 326	171 / 377	174 / 384

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Customizable voltage  
For power less than or equal to 2.2kW, the machine can be customized into single phase.
- Equipped with filter cleaning device for easy filter cleaning.
- Maintenance free powerful turbine motor can work continuously for 24 hours.
- Pressure gauge to detect filter clogging.
- Easy dust container cleaning.



## • Optional Configurations

- > Economical Version: VA
- > Filter bag Version: VZ
- > Self-cleaning Version: VZSF
- > ATEX Explosion- proof Version: VZSB
- > Remote Control

# VZSB Series

ATEX Heavy Duty Industrial Vacuum Cleaner

## • Product Description

VZSB Series are ATEX- certified Vacuum Cleaners with high pressure; very ideal for sucking/absorbing large mixed particles or chips in continuous applications or installed to centralized extraction systems.



## • Applications

-  Suitable for single/ three phase working conditions.
-  Suitable for continuous working conditions and heavy dust extraction with explosion proof requirement.
-  Industries: Metal Processing (grinding, cutting, drilling, etc.)
-  Wood Working
-  Food Industry
-  Chemical Industry
-  Machine Cleaning
-  Active Metal (Aluminum, Magnesium, Titanium) Polishing, Grinding, Cutting, etc..

## • Technical Parameters

Model	VZSB-20	VZSB-34	VZSB-52
Voltage (V / Hz)	230 / 50	400 / 50	400 / 50
Power (kW) / (HP)	2.0 / 2.7	3.4 / 4.6	5.2 / 7.0
Max air flow (m <sup>3</sup> /h) / (CFM)	285 / 168	500 / 294	500 / 294
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2000 / 19.6	2000 / 19.6	2500 / 24.5
Noise dB (A)	72±2	73±2	75±2
Air inlet Dia. (mm) / (in)		Ø 50 / 2	
Filter area (m <sup>2</sup> ) / (sq.ft)		3.5 / 37.7	
Filter efficiency		>99%	
Capacity of collection barrel (L) / (gal)		100 / 26.4	
Dimensions [LxWxH] (mm) / (in)	1350*880*1500 / 53.1*34.6*59		
Weight (kg) / (lb)	130 / 286	150 / 330	180 / 397

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Customizable voltage  
For power less than or equal to 2.2kW, the machine can be customized into single phase.
- ATEX certified for Zone 22
- Maintenance free powerful turbine motor can work continuously for 24 hours.
- Equipped with filter cleaning device for easy filter cleaning.
- Pressure gauge to detect filter clogging
- Easy dust container cleaning



## • Optional Configurations

- > Normal Version: VZ Series
- > Self-cleaning Version: VZF Series
- > Spark Trap
- > Remote Control



# VZF Series






Heavy Duty Pulse Jet Industrial Vacuum Cleaner

## • Product Description

VZF Series are Heavy Duty Industrial Vacuum Cleaners with high pressure, pulse jet cleaning device; very ideal for sucking/absorbing large mixed particles or chips in continuous applications or installed to centralized extraction systems.



## • Applications

-  Suitable for three phase working conditions.
-  Ideal solution for continuous working, heavy and fine dust working condition.
-  Industries: Metal Processing (grinding, cutting, drilling, sandblasting, etc.)
-  PCB (cutting, drilling, routing, etc.)
-  Machine Cleaning



## • Technical Parameters

Model	VZF-22	VZF-30	VZF-40	VZF-55	VZF-75
Voltage (V / Hz)	380 / 50				
Power (kW) / (HP)	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10.0
Max air flow (m <sup>3</sup> /h) / (CFM)	265 / 156	318 / 187	420 / 247	530 / 312	700 / 412
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2350 / 23	2600 / 25.5	2600 / 25.5	3000 / 29.5	2700 / 26.5
Noise dB (A)	72±2	74±2	75±2	76±2	78±2
Air inlet Dia. (mm) / (in)	Ø 50 / 2				
Filter area (m <sup>2</sup> ) / (sq.ft)	>99%				
Capacity of collection barrel (L) / (gal)	65 / 17.2		100 / 26.4		
Dimensions [LxWxH] (mm) / (in)	1180*670*1370 / 45.6*23.4*54		1300*670*1570 / 51.2*26.4*61.9		
Weight (kg) / (lb)	120 / 265	144 / 317	165 / 366	187 / 412	190 / 419

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

## • Features

- Customizable voltage  
For power less than or equal to 2.2kW, the machine can be customized into single phase.
- Two filtration options to meet the requirements of different filtration accuracy.
- Equipped with filter self-cleaning device for easy filter cleaning.
- Maintenance free powerful turbine motor can work continuously for 24 hours.
- Pressure gauge to detect filter clogging.
- Easy dust container cleaning



## • Optional Configurations

- > Economy Version: VA Series
- > Manual filter cleaning Version: VZ Series
- > Explosion- proof Version: VZSB Series
- > PLC Control Panel: VZF-P Series
- > Air Compressor: VZF-K Series
- > Remote Control



# VFG Series




Two-stage Filtration Industrial Vacuum Cleaner

## • Product Description

VFG- E Series uses turbine motor which has the characteristics of long working hours, high pressure; very ideal for three phase high precision applications.

VFG- S Series uses carbon brush motor with high pressure and adjustable air flow; suitable for single phase high precision applications.

## • Applications

-  S-series is suitable for single phase working conditions. E-series is suitable for three phase working conditions.
-  Suitable for hazardous dust (e.g. chemical dust (non-flammable and explosive), silicon powder (concrete dust), carbon powder, fine metal dust); can effectively reduce the risk of secondary dust pollution.
-  Suitable for precious metal dust collection; can effectively improve the efficiency of dust recycling.



## • Technical Parameters

Model	VFG-1S	VFG-2S	VFG-3S	VFG-40E	VFG-75E	VFG-86E
Voltage (V / Hz)		230 / 50			380 / 50	
Power (kW) / (HP)	1.2 / 1.7	2.4 / 3.4	3.6 / 5.1	4.0 / 5.5	5.0 / 7.5	7.5 / 10
Max air flow (m <sup>3</sup> /h) / (CFM)	220 / 129	420 / 258	600 / 353	420 / 247	530 / 312	700 / 412
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2400 / 23.5	2400 / 23.5	2400 / 23.5	2600 / 25.5	3000 / 29.5	2700 / 26.5
Noise dB (A)	80±2	85±2	88±2	78±2	83±2	83±2
Air inlet Dia. (mm) / (in)	Ø 50 / 2	Ø 50 / 2	Ø 50 / 2	Ø 50 / 2	Ø 75 / 3	Ø 75 / 3
Filter area (m <sup>2</sup> ) / (sq.ft)	1.5 / 16.2	2.4 / 25.8	2.8 / 30.1	1.9 / 20.5	2.1 / 22.6	2.1 / 22.6
Filter efficiency	>99.9%					
Dimensions【LxWxH】(mm) / (in)	850*480*1200 / 31.5*18.0*47.0	860*580*1220 / 33.8*23.0*48.0	940*580*1370 / 37.0*23.0*55.0	980*650*1550 / 38.6*25.6*61	1270*730*1620 / 50*28.7*63.8	1270*730*1620 / 50*28.7*63.8
Weight (kg) / (lb)	62 / 121	80 / 176	90 / 198	139 / 306	170 / 375	180 / 397

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



## • Features

- Compact and mobile structure.
- Two-stage filtration for high filtration accuracy.
- Equipped with filter cleaning device for easy filter cleaning.
- Powerful carbon brush motors with independent controller, or maintenance free powerful turbine motor can work continuously for 24 hours.
- Cassettes for easier dust cleaning. Avoid secondary pollution. (Length:22m)
- Pressure gauge to detect filter clogging.



## • Optional Configurations

- › Single phase self-cleaning version
- › Three phase self-cleaning version
- › Lifting structure version
- › Soft starter (Models with power greater than 4kW)
- › Remote Control

# INDUSTRIAL DUST COLLECTOR



## Introduction

Villo provides wide range of cartridge type dust collectors that are efficient and cost effective. These dust collectors are engineered to remove a wide range of dust and airborne particles that can effect production environment.



# VJ-H Series

Manual Cleaning Type  
Industrial Dust Collector



## • Product Description

VJ-H Series is a simple industrial dust collector with large air volume, stable and reliable mechanical structure, small footprint, and flexible movement.

## • Features

- Horizontal filter installation mechanism can reduce the height of machine, and can be very suitable for space limited working conditions. The material of filter cartridge can be water-oil resistant, polyester or other type depending upon the customer needs.
- Patented manual filter cleaning is used (Patent No. 201220489001.3). At the back side of the machine, there is a rotary handle to clean the accumulated dust on the filter. It is convenient and cost saving.
- To keep the machine running safely and conveniently, the machine is equipped with a simple type magnetic switch, which has the thermal overload protection function. Also, it can achieve remote control function according to customer's requirement.



## • Applications

Lithium battery slitting machine, composite material cutting machine, CNC machine, PCB V-CUT machine, vertical sawing machine for wood or metal processing applications, etc.



## • Optional Configurations

- › Multi tower light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Enlarged capacity of dust collection bin
- › Additional H13/H14 filter



## • Technical Parameters

Model	VJ-1.5H	VJ-2.2H	VJ-3.0H
Voltage (V / Hz)		380 / 50	
Power (kW) / ( HP )	1.5 / 2.0	2.2 / 3.0	3.0 / 4.0
Max air flow (m <sup>3</sup> /h) / ( CFM )	1500 / 883	2200 / 1295	3000 / 1765
Max air pressure (Pa) / (mmH <sub>2</sub> O)	1800 / 184	2500 / 255	2500 / 255
Air inlet Dia. (mm) / (in)	Ø 150 / 6		Ø 200 / 8
Noise dB (A)	73±2	75±2	77±2
Filter area ( m <sup>2</sup> ) / ( sq.ft )		8 / 86	
Filter efficiency	>99%		
Filter cleaning method	Rotary vane dust vibration structure		
Capacity of the dust container(L) / ( gal)	15 / 4.0		
Dimensions [LxWxH] (mm) / (in)	653*700*1300 / 25.7*27.6*51.2	653*700*1300 / 25.7*27.6*51.2	653*700*1362 / 25.7*27.6*53.6
Weight (kg) / (lb)	130 / 287	140 / 309	190 / 419

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VJF Series

Air Pulse Jet Dust Collector



## • Product Description

VJF series is an industrial dust collector with multi-motor power, large air volume, pulse jet filter cleaning, stability and reliability. It can meet the dust removal needs of multiple industries and wide range of processes.

## • Features

- Compact design allows placement flexibility and saves floor space.
- The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- Real-time monitoring of machine pressure changes can quickly detect whether the filter needs to be cleaned.



## • Applications

A self-cleaning dust collector for continuous applications, where high collection efficiency is essential, such as grinding, sandblasting, mixing, packaging, vibrating screen, crushing, etc.



## • Optional Configurations

- › Multi tower light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector
- › Moderate pressure motor



## • Technical Parameters

Model	VJF-1.5	VJF-2.2	VJF-3.0	VJF-4.0	VJF-5.5	VJF-7.5	VJF-11	VJF-15
Voltage (V / Hz)	380 / 50							
Power(kW) / (HP)	1.5 / 2.0	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10	11 / 15	15 / 20
Max air flow (m <sup>3</sup> /h) / (CFM)	1500 / 882	2200 / 1294	3000 / 1765	4000 / 2353	5500 / 3235	7500 / 4412	9000 / 5294	12000 / 7059
Max air pressure (Pa) / (mmH <sub>2</sub> O)	1800 / 184	2500 / 255	2500 / 255	2500 / 255	2500 / 255	2600 / 265	2700 / 275	2800 / 286
Filter area (m <sup>2</sup> ) / (sq.ft)	11 / 118.5	22 / 237	22 / 237	44 / 474	44 / 474	66 / 710	99 / 1066	99 / 1066
Filter efficiency	>99%							
Dust container capacity (L) / (gal)	30 / 7.9	50 / 13.2		60 / 15.9 (2pcs)	80 / 21.2(2pcs)	100 / 26.4(2pcs)	100 / 26.4(2pcs)	
Noise dB (A)	71±2	73±2	74±2	76±2	78±2	79±2	80±2	81±2
Filter cleaning method	Pulse jet							
Air inlet Dia. (mm) / (in)	Ø150 / 6		Ø200 / 8	Ø250 / 10		Ø300 / 12	Ø350 / 14	Ø400 / 16
Dimensions [LxWxH] (mm) / (in)	795*630*1730 / 31.3*24.8*68.1	995*725*1860 / 39.2*28.6*73.3		1100*925*2050 / 43.3*36.4*80.7	1195*1035*2100 / 47.1*40.8*82.7	1325*955*2040 / 57.1*37.6*80.3	1325*1305*2180 / 52.2*51.4*85.9	
Weight (kg) / (lb)	180 / 397	260 / 574	280 / 618	340 / 750	360 / 794	600 / 1823	810 / 1786	830 / 1830

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VJFB Series

Industrial Explosion Proof  
Dust Collector



## • Product Description

VJFB series industrial dust collector has the characteristics of explosion-proof, large air volume, pulse jet cleaning, stable and reliable structure.

## • Features

- Compact design allows placement flexibility and saves floor space.
- Safety explosion venting membrane.
- Explosion proof motor and electrical control cabinet guarantees the safe running of the machine.
- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- Vertical filter cartridge installation mechanism.
- Differential pressure gauge



## • Applications

Specialized for collecting wide range of inflammable and explosive dust. It is suitable for powder metallurgy, aluminum powder grinding, grain processing, food production, high polymer plastics industry, synthetic dyes and coatings, pesticide and pharmaceutical manufacturing, plant fiber textile technology and so on.



## • Optional Configurations

- › Flameless quench device
- › Explosion isolation valve
- › Multi tower light
- › Stainless steel version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector



## • Technical Parameters

Model	VJFB-1.5	VJFB-2.2	VJFB-3.0	VJFB-4.0	VJFB-5.5	VJFB-7.5	VJFB-11	VJFB-15
Voltage (V / Hz)	380 / 50							
Power(kW) / (HP)	1.5 / 2.0	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10	11 / 15	15 / 20
Max air flow (m <sup>3</sup> /h) / (CFM)	1500 / 882	2200 / 1294	3000 / 1765	4000 / 2353	5500 / 3235	7500 / 4412	9000 / 5294	12000 / 7059
Max air pressure (Pa) / (mmH <sub>2</sub> O)	1800 / 184	2500 / 255	2500 / 255	2500 / 255	2500 / 255	2600 / 265	2700 / 275	2800 / 286
Filter area (m <sup>2</sup> ) / (sq.ft)	11 / 118.5	22 / 137	22 / 137	44 / 474	44 / 474	66 / 710	99 / 1066	99 / 1066
Filter efficiency	99%							
Dust container capacity (L) / (gal)	30 / 7.9	50 / 13.2		60 / 15.9 (2pcs)	80 / 21.2 (2pcs)	100 / 26.4 (2pcs)	100 / 26.4 (2pcs)	100 / 26.4 (2pcs)
Noise dB (A)	71±2	73±2	74±2	76±2	78±2	79±2	80±2	81±2
Anti-explosive level	ExdIIBT4							
Filter cleaning method	Pulse jet							
Air inlet Dia. (mm) / (in)	Ø150 / 6		Ø200 / 8		Ø250 / 10		Ø300 / 12	Ø350 / 14    Ø400 / 16
Dimensions [LxWxH] (mm) / (in)	790*605*1730 / 31.1*23.8*68.1	1000*700*1900 / 39.4*29.6*74.8		1060*910*2095 / 41.8*35.9*82.5	1180*1010*2190 / 46.5*39.8*86.2	1350*900*1985 / 53.1*35.4*78.1	1350*1250*2175 / 53.1*49.2*85.6	1350*1250*2175 / 53.1*49.2*85.6
Weight (kg) / (lb)	190 / 419	270 / 596	300 / 662	360 / 794	380 / 838	630 / 1389	840 / 1852	870 / 1918

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VJFX Series

Industrial Auto Discharge  
Dust Collector



## • Product Description

VJFX series industrial dust collector is equipped with automatic discharge system. This dust collector have features of large air volume, self-cleaning function, automatic discharge, stable and small footprint.

## • Features

- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- PTFE coated filter cartridge  
The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Rotary discharge valve  
Equipped with rotary discharge valve for automatic dust unloading.



## • Applications

Suitable for working condition with large amount of dust such as powder feeding, mixing, grinding or cutting job, wood working and so on.



## • Optional Configurations

- › Pressure indication light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Customizable collection box
- › Tank level alarm
- › Gate valve
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector



## • Technical Parameters

Model	VJFX-1.5	VJFX-2.2	VJFX-3.0	VJFX-4.0	VJFX-5.5	VJFX-7.5	VJFX-11	VJFX-15		
Voltage (V / Hz)	380 / 50									
Power (kW) / ( HP )	1.5 / 2.0	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10	11 / 15	15 / 20		
Max air flow (m <sup>3</sup> /h) / ( CFM )	1500 / 883	2200 / 1295	3000 / 1765	4000 / 2354	5500 / 3237	7500 / 4414	9000 / 5294	12000 / 7059		
Max air pressure (Pa) / (mmH <sub>2</sub> O)	1800 / 184	2500 / 255	2500 / 255	2500 / 255	2500 / 255	2600 / 265	2700 / 275	2800 / 286		
Filter area (m <sup>2</sup> ) / ( sq.ft )	11 / 118.5	22 / 237	22 / 237	44 / 474	44 / 474	66 / 710	99 / 1066	99 / 1066		
Filter efficiency	>99%									
Dust container capacity (L) / ( gal)	According to customers' demand									
Noise dB (A)	71±2	73±2	74±2	76±2	78±2	79±2	80±2	81±2		
Filter cleaning method	Pulse jet + Automatic discharge									
Ability of discharge (L/min) / ( gal/min)	48 / 12.7	96 / 25.4	96 / 25.4	144 / 38.0	144 / 38.0	192 / 50.7	192 / 50.7	192 / 50.7		
Air inlet Dia. (mm) / (in)	Ø150 / 6		Ø200 / 8		Ø250 / 10		Ø300 / 12		Ø350 / 14	
Dimensions [LxWxH] (mm) / (in)	1100*1040*2450 / 43.3*41.0*96.5	1100*1040*2750 / 43.3*41.0*108.3	1100*1040*2850 / 43.3*41.0*112.2	1200*1200*2950 / 47.3*47.3*116.2	1200*1200*3050 / 47.3*47.3*120.1	1765*1280*3200 / 69.5*50.4*126.0	1765*1680*3350 / 69.5*50.4*131.9	1765*1680*3500 / 69.5*50.4*137.8		
Weight (kg) / (lb)	230 / 507	300 / 661	400 / 882	500 / 1102	550 / 1213	600 / 1323	700	750		

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VJCF Series

High Negative Pressure Type  
Central Vacuum System



## • Product Description

VJCF Series is an industrial dust collector with high negative pressure, pulse jet cleaning, stable structure and small footprint.

## • Features

- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- PTFE coated filter cartridge  
The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Vertical installation would protect the filter from dust accumulation, which would ultimately increase the filter life, reduce gasket leaks, and result in better pulse cleaning.
- Spoiler installed at the air inlet let the dust particles to fall directly in to the dust collector. This avoids to install an additional cyclone separator.



## • Applications

Ideal for PCB processing industry with processes such as, multi-axis drilling, grinding board, chamfering, cutting, central cleaning for workshop, etc.



## • Optional Configurations

- › Multi tower light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Enlarged capacity of dust bin
- › Central control system with variable frequency and constant pressure
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector



## • Technical Parameters

Model	VJCF-75	VJCF-110	VJCF-125	VJCF-150	VJCF-185	VJCF-200	VJCF-250
Voltage(V / Hz)	380 / 50						
Power (kW) / (HP)	7.5 / 10.0	11.0 / 15.0	12.5 / 16.8	15 / 20	18.5 / 25	20 / 27	25 / 33.5
Max air flow (m <sup>3</sup> /h) / (CFM)	700 / 412	900 / 530	1050 / 618	1150 / 677	1370 / 806	1940 / 1141	1940 / 1141
Max air pressure (mmH <sub>2</sub> O) / (kPa)	2700 / 26.5	2800 / 27.5	2800 / 27.5	3300 / 32.3	3100 / 30.5	2200 / 21.6	3100 / 30.5
Filter area (m <sup>2</sup> ) / (sq.ft)	22 / 237					44/474	
Filter efficiency	>99%						
Filter cleaning method	Pulse jet						
Dust container capacity (L) / (gal)	50 / 13.2					80 / 21	
Noise dB (A)	72±2	74±2	74±2	74±2	77±2	77±2	80±2
Form of emptying	Traveler curtain type holder-on container						
Air inlet Dia. (mm) / (in)	Ø75 / 3	Ø100 / 4	Ø100 / 4	Ø100 / 4	Ø150 / 6	Ø150 / 6	Ø150 / 6
Dimensions【LxWxH】(mm) / (in)	1350*900*1750 / 53*35.4*68.9				1700*900*1850 / 67.0*35.5*72.9		
Weight (kg) / (lb)	370 / 815	470 / 1036	500 / 1102	530 / 1169	600 / 1323	625 / 1378	650 / 1433

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VX Series

Cabinet Type High Pressure Dust Collector




## • Product Description

VX series is an industrial dust collector with high negative pressure, stable design, small footprint and flexible movement.

## • Features

- Equipped with manual filter cleaning device for easy filter cleaning. Can be changed to Self-cleaning type upon the customer's requirement.
- Maintenance free powerful turbine motor which can work continuously for 24 hours.



## • Applications

A manual cleaning dust collector with high negative pressure for continuous working applications such as metal working (grinding, cutting, drilling, sandblasting); PCB machining; battery manufacturing, etc.



## • Optional Configurations

- › Self-cleaning version
- › Stainless steel version
- › Enlarged collection bin
- › Explosion proof version
- › Converter
- › Multi tower light
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector
- › Differential pressure alarm



## • Technical Parameters

Model	VX-150	VX-220	VX-300	VX-400	VX-550	VX-750
	VX-150F	VX-220F	VX-300F	VX-400F	VX-550F	VX-750F
Voltage (V / Hz)	380 / 50					
Power (kW) / (HP)	1.6 / 2.15	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10.0
Max air flow (m <sup>3</sup> /h) / (CFM)	210 / 55	265 / 156	318 / 187	420 / 247	530 / 312	700 / 412
Max vacuum (mmH <sub>2</sub> O) / (kPa)	2000 / 19.6	2350 / 23	2600 / 25.5	2600 / 25.5	3000 / 29.4	2700 / 26.5
Air inlet Dia. (mm) / (in)	Ø 50/2					
Filter efficiency	>99%					
<b>VX series</b>						
Filter area (m <sup>2</sup> ) / (sq.ft)	1.8 / 19.4		3.5 / 37.7		3.5 / 37.7	
Capacity of collection barrel (L) / (gal)	22 / 5.8		26 / 6.9		30 / 7.9	
Dimensions [LxWxH] (mm) / (in)	530*540*1040 / 20.9*21.3*40.9		600*750*1250 / 23.6*29.5*49.2		760*680*1355 / 30.0*26.8*53.4	
<b>VX-F series</b>						
Filter area (m <sup>2</sup> ) / (sq.ft)	2 / 21.5		4.8 / 51.7		7.2 / 77.6	
Capacity of collection barrel (L) / (gal)	30 / 7.9		30 / 7.9		40 / 10.6	
Dimensions [LxWxH] (mm) / (in)	860*650*940 / 33.9*25.6*37.0		860*650*940 / 33.9*25.6*37.0		1050*780*1150 / 41.3*30.7*45.3	

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



# VN Series

Separator Built-in Type  
Dust Collector



## • Product Description

VN series is an industrial dust collector focusing on the laser cutting industry. It has the characteristics of large air volume, pulse jet cleaning, stable and reliable design.

## • Features

- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- PTFE coated filter cartridge  
The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Easy installation of horizontal type filter, can reduce the time to replace the filter.
- Spoiler installed at the air inlet let the dust particles to fall directly in to the dust container. This avoids to install an additional cyclone separator.



## • Applications

An effective solution for machine processes such as sheet metal laser cutting, grinding, sandblasting and other operations.



## • Optional Configurations

- › Multi tower light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector
- › Customizable collection box
- › Tank level alarm



## • Technical Parameters

Model	VN-4500	VN-6500	VN-8500
Voltage (V / HZ)		380 / 50	
Power (kW) / (HP)	5.5 / 7.5	7.5 / 10	11 / 15
Max air flow (m <sup>3</sup> /h) / (CFM)	4500 / 2650	6500 / 3825	8500 / 5000
Max air pressure (Pa) / (mmH <sub>2</sub> O)	4500 / 459	4500 / 459	4500 / 459
Filter area (m <sup>2</sup> ) / (sq.ft)	94 / 1012	141 / 1518	141 / 1518
Air inlet Dia. (mm) / (in)	Ø 250 / 10	Ø 250 / 10	Ø 300 / 12
Noise dB (A)	75±2	76±2	77±2
Filter efficiency		99%	
Filter cleaning method		Pulse jet	
Dimensions [LxWxH] (mm) / (in)	1290*1390*2285 / 50.8*54.7*90.0	1290*1390*2735 / 50.8*54.7*107.7	1495*1565*3060 / 58.9*61.7*120.5

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.



# VJFCB Series

High Negative Pressure  
Explosion Proof Dust Collector



## • Product Description

VJFCB Series is an explosion-proof industrial dust collector with high negative pressure, pulse jet cleaning, stable and small footprint. It meets the explosion-proof requirements for the flammable and explosive dust environment.

## • Features

- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Safety explosion venting membrane: to absorb the explosion wave in case of accident.
- Explosion proof motor and electrical control box: guarantees the safe running of the machine. All of the electrical components are "Schneider" brand.



## • Applications

An effective solution for machining processes such as laser welding, mixing, cutting, bagging, grinding, sand blasting, plexiglass processing, vibration screen, air conveying, packaging, etc.



## • Optional Configurations

- › Flameless quench device
- › Explosion isolation valve
- › Multi tower light
- › Stainless steel version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector



## • Technical Parameters

Model	VJFCB-1.5	VJFCB-2.2	VJFCB-3.0	VJFCB-4.0	VJFCB-5.5	VJFCB-7.5	VJFCB-11W	VJFCB-15W
Voltage (V / Hz)	380 / 50							
Power(kW) / (HP)	1.5 / 2.0	2.2 / 3.0	3.0 / 4.0	4.0 / 5.5	5.5 / 7.5	7.5 / 10	11 / 15	15 / 20
Max air flow (m <sup>3</sup> /h) / (CFM)	210 / 123	265 / 156	318 / 187	420 / 247	530 / 312	700 / 412	1000 / 588.6	1320 / 776.9
Max air pressure (mmH <sub>2</sub> O) / (kPa)	2000 / 19.6	2350 / 23.0	2700 / 26.5	2600 / 25.5	3000 / 29.4	2700 / 26.5	2350 / 23	2350 / 23
Filter efficiency	99%							
Filter area (m <sup>2</sup> ) / (sq.ft)	11 / 118.5			22 / 237				
Filter cleaning method	Pulse jet							
Air inlet Dia. (mm) / (in)	Ø 50 / 2	Ø 50 / 2	Ø 50 / 2	Ø 50 / 2	Ø 75 / 3	Ø 75 / 3	Ø 100 / 4	Ø 100 / 4
Dimensions【LxWxH】(mm) / (in)	750*680*1770 / 29.6*26.8*69.7	750*680*1800 / 29.6*26.8*70.9	750*680*1860 / 29.6*26.8*73.3	840*780*2010 / 33.1*30.7*79.2	970*900*1950 / 38.2*35.5*76.8	1040*900*2150 / 41.0*35.5*84.7	1980*1010*2100 / 78.0*39.8*82.7	1980*1010*2100 / 78.0*39.8*82.7
Anti-explosive level	ExdIIBT4							

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VJFGB Series

Moderate High Pressure  
Explosion Proof Dust Collector



## • Features

- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Spoiler installed at the air inlet let the dust particles to fall directly into the dust collector. This avoids to install an additional cyclone separator.
- Safety explosion venting membrane: to absorb the explosion shock wave in case of accident.
- Explosion proof motor and electrical control box: guarantees the safe running of the machine. All of the electrical components are "Schneider" brand.



## • Applications

It is suitable for process such as mixing, cutting, bagging, grinding, sandblasting, plexiglass processing, vibrating screen, air transportation, packaging operation, etc.



## • Product Description

VJFGB Series is an explosion-proof industrial dust collector with moderate high negative pressure, pulse jet cleaning, stable structure and small footprint. It meets the explosion-proof requirements in the environment with inflammable and explosive dust.

## • Optional Configurations

- › Flameless quench device
- › Explosion isolation valve
- › Multi tower light
- › Stainless steel version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust Concentration Detector



## • Technical Parameters

Model	VJFGB-1.5	VJFGB-2.2	VJFGB-3.7	VJFGB-5.5	VJFGB-7.5	VJFGB-11W	VJFGB-15W
Voltage (V / Hz)	380 / 50						
Power(kW) / (HP)	1.5 / 2.0	2.2 / 3.0	3.7 / 5.5	5.5 / 7.5	7.5 / 10	11 / 15	15 / 20
Max air flow (m <sup>3</sup> /h) / (CFM)	1200 / 706	1980 / 1165	2880 / 1694	3000 / 1765	3600 / 2118	3900 / 2294	5400 / 3176
Max air pressure (Pa) / (mmH <sub>2</sub> O)	2000 / 204	2400 / 245	3800 / 387	4000 / 408	4000 / 408	5000 / 510	5000 / 510
Filter efficiency	99%						
Filter area (m <sup>2</sup> ) / (sq.ft)	11 / 118.5	22 / 237	22 / 237	44 / 474	44 / 474	44 / 474	66 / 710
Filter cleaning method	Pulse jet						
Air inlet Dia. (mm) / (in)	Ø 100 / 4	Ø 150 / 6	Ø 200 / 8	Ø 200 / 8	Ø 200 / 8	Ø 250 / 10	Ø 250 / 10
Dimensions[LxWxH] (mm) / (in)	750*700*1750 / 29.5*27.6*68.9	900*800*1850 / 35.5*31.5*72.9	900*800*1850 / 35.5*31.5*72.9	1000*900*1950 / 39.4*35.5*76.8	1000*900*1950 / 39.4*35.5*76.8	2460*1405*2610 / 96.9*55.3*102.8	2730*1870*2890 / 107.5*73.7*113.8
Anti-explosive level	ExdIIBT4						

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VFO Series

Dust Collection System



## • Product Description

VFO Series is a central dust collection system. It has the characteristics of large air volume, stable structure and convenient cartridge installation and ejection mechanism. It is suitable to deal with the production and processing of a large amount of dust.

## • Features

- Modular combination structure  
Only requires a small changes to the original equipment and piping systems, modular dust collector unit can achieve rapid expansion to increase productivity and expand production scale, reduce expansion cost.
- Easy installation & ejection of declined insertion type filter, can reduce the time to replace the filter.
- The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.



## • Applications

Suitable for wood working, grinding, cutting, feeding and other applications with a large amount of dust in other multi-site centralized dust conditions.



## • Optional Configurations

- › Multi tower light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector
- › Customizable collection box
- › Tank level alarm
- › Gate valve
- › Central control system with variable frequency and constant pressure



## • Technical Parameters

Model	VFO 3-12	VFO 3-24	VFO 3-36	VFO 3-48	VFO 3-60	VFO 3-72
Voltage (V / Hz)	380 / 50					
Air flow (m <sup>3</sup> /h) / (CFM)	9000~15000 / 5300~8800	18000~30000 / 10600~17700	27000~45000 / 15900~26500	36000~60000 / 21200~35300	45000~75000 / 26500~44100	54000~90000 / 32000~53000
Power	Calculate the total pressure / static pressure according to the total resistance of the system, and then select the appropriate fan power					
Filter cartridge quantity (pcs)	12	24	36	48	60	72
Filter area (m <sup>2</sup> ) / (sq.ft)	144 / 1550	288 / 3100	432 / 4650	576 / 6200	720 / 7750	864 / 9300
Filter efficiency	99%					
Capacity of the dust container (L) / (gal)	100 / 26.4 (1pcs)	200 / 52.8 (2pcs)	300 / 79.2 (3pcs)	400 / 105.6 (4pcs)	500 / 132 (5pcs)	600 / 158.4 (6pcs)
Noise dB (A)	82±2	83±2	85±2	85±2	88±2	90±2
Filter cleaning method	pulse jet cleaning+holder on dust collecting box					
Dimensions (Excluding the Blower) [LxWxH] (mm) / (in)	1120*1910*3100 / 44.1*75.2*122.0	2240*1910*3640 / 88.2*75.2*143.3	3360*1910*3640 / 132.3*75.2*143.3	4480*1910*3640 / 176.4*75.2*143.3	5600*1910*3640 / 220.5*75.2*143.3	6720*1910*3640 / 264.6*75.2*143.3
Weight (kg) / (lb)	400 / 882	800 / 1764	1200 / 2646	1600 / 3528	2000 / 4410	2400 / 5290

※ The air flow and Negative pressure can be calculated according to the actual condition, and then choose the bigger or more suitable power machine.

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VH- Z Series

Large Air Flow Type Central Dust Collector



## • Features

- Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the working requirements.
- The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- Vertical installation would protect the filter from dust accumulation, which would ultimately increase the filter life, reduce gasket leaks, and result in better pulse cleaning.



## • Applications

Suitable for capacitance spray operations, tin packaging operations, CCL operations, spraying production line operations, ceramic raw embryo processing, polishing workshop, welding smoke purification and other multi-site centralized dust conditions.



## • Optional Configurations

- › Multi tower light
- › Stainless steel version
- › Explosion proof version
- › Activated carbon filter
- › Converter
- › Additional H13/H14 filter
- › Air speed sensor
- › Temperature sensor
- › Dust concentration detector
- › Customizable collection box
- › Tank level alarm
- › Gate valve
- › Central control system with variable frequency and constant pressure



## • Technical Parameters

Model	VH-Z-8500	VH-Z-16000	VH-Z-19000	VH-Z-21000	VH-Z-23000	VH-Z-30000
Voltage(V / Hz)	380 / 50					
Air flow (m <sup>3</sup> /h) / (CFM)	5710~10600 / 3360~6240	10600~21200 / 6240~12470	13200~26300 / 7765~15470	17500~22450 / 10300~13200	19650~25250 / 11560~14850	28100~36450 / 16530~21450
Power(kW) / (HP)	Calculate the total pressure/static pressure according to the total resistance of the system, and then select the appropriate fan power					
Filter area (m <sup>2</sup> ) / ( sq.ft )	84 / 904	170 / 1830	204 / 2196	204 / 2196	306 / 3294	360 / 3875
Filter efficiency	99%					
Capacity of the dust container(L) / (gal)	70 / 18.5	50×2 / 13.2×2	50×2 / 13.2×2	50×2 / 13.2×2	50×2 / 13.2×2	50×3 / 13.2×2
Noise dB (A)	82±2	83±2	85±2	85±2	88±2	90±2
Filter cleaning method	pulse jet cleaning+holder on dust collecting box					
Air inlet Dia. (mm) / (in)	Ø350 / 14	Ø500 / 20	Ø550 / 22	Ø550 / 22	Ø600 / 24	Ø650 / 26
Dimensions (Excluding the Blower) [LxWxH] (mm) / (in)	1450*1134*1963 / 57.1*44.6*77.2	1840*1350*2075 / 72.4*53.1*81.7	2000*1350*2075 / 78.7*53.1*81.7	2000*1350*2075 / 78.7*53.1*81.7	2500*1500*2200 / 98.4*59.1*86.7	2500*1500*2400 / 98.4*59.1*94.5

The air flow and Negative pressure is adjustable according to the actual condition, and then choose the bigger or more suitable power machine.

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VH/VHX Series

Multiple Filtration Type  
Fume Extractor



## • Product Description

VH series are high efficiency fume extractors with multiple filtration system; very ideal for the air purification of smoke and fumes in laser and related processing.

VHX series are highly efficient welding fume extractors with 3-stage filter system; very ideal for the fume and dust extraction in the soldering process of the circuit boards and electronic industry.

## • Applications

VH Series: Low power laser welding, cutting, engraving and other laser processing in the auto industry, industrial automation, etc.

VHX Series: Welding (manual arc welding; gas shielded arc welding; argon arc welding, etc.) cutting, grinding, and other smoke purification applications.



## • Optional Configurations

- > Stainless steel version
- > Multi tower light
- > Explosion-proof version
- > Upgrade to Siemens motor
- > Swivel casters with brake
- > HEPA filter
- > Filter cartridge version

## • Features

- Filtration efficiency is 99.97%-99.99% at 0.3 microns with multiple filtration system.
- Large airflow, simple structure, economic space occupation, cost-saving and reliable.
- The brushless motor and excellent metal plate technology ensures long-lasting durability.
- Compact structure product including convenient 360 degree rotation suction arm for desirable positioning.
- The product uses the PWM controller, the air volume is variable, and it is practical, convenient and energy-saving.



## • Technical Parameters

Model	VHX-15J	VHX-15	VHX-15D	VH-400	VH-880	VH-1000
Voltage (V / Hz)	220 / 50					
Power (W) / (HP)	135 / 0.18			400 / 0.55	880 / 1.18	1000 / 1.34
Max air flow (m <sup>3</sup> /h) / (CFM)	200 / 118			257 / 152	500 / 294	600 / 353
Max air pressure (Pa) / (mmH <sub>2</sub> O)	2500 / 255	3200 / 326	3200 / 326	5600 / 571	7000 / 714	7000 / 714
Noise dB (A)	60±2			60±2	64±2	67±2
Air inlet Dia. (mm) / (in)	Ø 50 / 2.0	Ø 50 / 2.0	2*Ø 50 / 2	Ø 50 / 2	Ø 100 / 4	Ø 100 / 4
Filter efficiency	>99%					
Dimensions [LxWxH] (mm) / (in)	320*300*460 / 12.6*11.8*18.1			500×440×1000 / 19.7*17.3*39.4	450×450×1200 / 17.7*17.7*47.2	550×670×1300 / 21.6*26.4*51.2
Weight (kg) / (lb)	20 / 44	20 / 44	22 / 48.5	65 / 143	75 / 165	85 / 187

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

# VH-T/VHT Series

Filter Cartridge Type  
Fume Extractor



## • Product Description

VH-T series are highly efficient welding fume extractors with self-cleaning system, very ideal for the fume and dust disposal in the welding workshop or other similar working conditions.

VHT Series are also high efficiency welding fume extractors that are equipped with high efficiency filter cartridge. They are ideal for the fume and dust disposal in the soldering process of the circuit boards and electronic industry.

## • Applications

VH-T: Welding (manual arc welding; gas shielded arc welding; argon arc welding, etc.), cutting, grinding, and other smoke purification applications.

VHT: Smoke purification in single phase voltage working conditions. Such as the soldering, wave soldering, laser welding, sculpture, etc.



## • Optional Configurations

- > Stainless steel version
- > Multi tower light
- > Explosion-proof version
- > Odor removal version
- > Manual/ Self filter-cleaning version
- > Swivel casters with brake

## • Features

- The filter material is polyester with PTFE coated, which can filter 99.9% dust at 0.3 microns.
- The compact and portable product including a convenient 360-degree rotation suction arm for desirable positioning.
- VH-T: Pulse jet cleaning method for the filter makes machine to work continuously. User can set the pulse frequency depending upon the requirements.
- VH-T: Siemens motor and excellent metal plate technology ensures long-lasting durability.
- VHT: The high quality brushless motor and excellent metal plate technology ensures long-lasting durability.



VHT



VH-T

## • Technical Parameters

Model	VHT-15S	VH-150T	VH-220T
Voltage (V / Hz)	220 / 50	380 / 50	
Power (W) / (HP)	135 / 0.18	1500 / 2.0	2200 / 3.0
Max air flow (m <sup>3</sup> /h) / (CFM)	220 / 129.4	1500 / 882	2200 / 1294
Max air pressure (Pa) / (mmH <sub>2</sub> O)	3200 / 326	1780 / 182	2000 / 204
Noise dB (A)	63±2	75±2	
Air inlet Dia. (mm) / (in)	Ø 50 / 2.0	Ø 150 / 6.0	Ø 150 / 6.0 (2pcs, Ø150/pcs)
Filter area (m <sup>2</sup> ) / (sq.ft)	1.8 / 19.4	10.0 / 12.0	15.0 / 18.0
Filter efficiency	>99%	>99%	
Dimensions [LxWxH] (mm) / (in)	320*300*520 / 12.6*11.8*20.5	700*750*1400 / 27.6*29.5*55.1	700*750*1600 / 27.6*29.5*63.0
Weight (kg) / (lb)	23 / 50.7	150 / 331	210 / 463

\*Note: The mentioned values of Airflow and the Pressure may vary slightly with change in air inlet size.

## Accessories List



### Suction Nozzle

- Diameter:  $\phi 40\text{mm}/\phi 50\text{mm}$
- Material:  $\phi 40\text{mm}$ —Plastic  
 $\phi 50\text{mm}$ —Aluminum



### Hose Connector

- Diameter:  $\phi 40\text{mm}$
- Material: Plastic



### Water Brush

- Diameter:  $\phi 40\text{mm}/\phi 50\text{mm}$
- Material: Aluminum



### Solenoid Valve



### Schneider switch control box



### Carbon Brush Motor



### Brush

- Diameter:  $\phi 40\text{mm}/\phi 50\text{mm}$
- Material: Aluminum



### Round Brush

- Diameter:  $\phi 40\text{mm}$
- Material: Plastic



### Bend Pipe

- Diameter:  $\phi 40\text{mm}/\phi 50\text{mm}$
- Material: Aluminum



### Collection Bag



### Filter Cartridge / Bag



### Motor for Filter Cleaning



### Double Bend Pipe

- Diameter:  $\phi 50\text{mm}$
- Material: Aluminum



### Hose

- Diameter:  $\phi 40\text{mm}/\phi 50\text{mm}$
- Material: PVC



### Pressure Gauge



### Spark Trap



### Turbine motor



### Wall Valve



## Accessories List



Siemens Inverter



Siemens PLC



Siemens PLC Touch Screen



Differential Pressure Transmitter



Differential Pressure Switch



Differential Pressure Gauge



Tuning Fork Level Switch



Multi Tower Light



Pressure Gauge

## Accessories List



Rotary Discharge Valve



Pneumatic Gate Valve



Temperature Sensor




HEPA Filter



Explosion Isolation Valve



Flameless Quench



Explosion Vent



Filter Cartridge



Dust Concentration Detector



Soft Starter



Air Speed Sensor



Flexible Suction Arm